



120°C Static water.....1.37MPa(14kgf/cm²)
 220°C Steam, air,gas,oil.....0.98MPa(10kgf/cm²)

● Use for lubricating or hydraulic oil is acceptable.
 Contact KITZ Corporation for technical advice,
 if valves are used as heat transfer media.

Fig. 10SJB



Class JIS10K

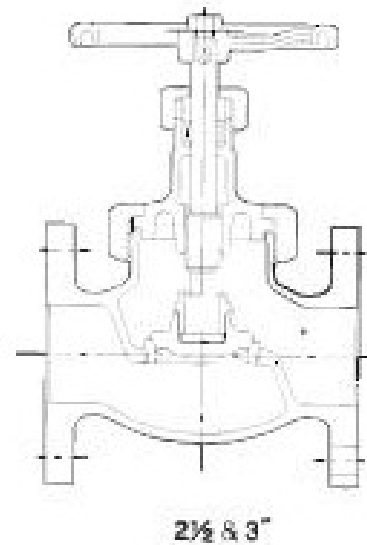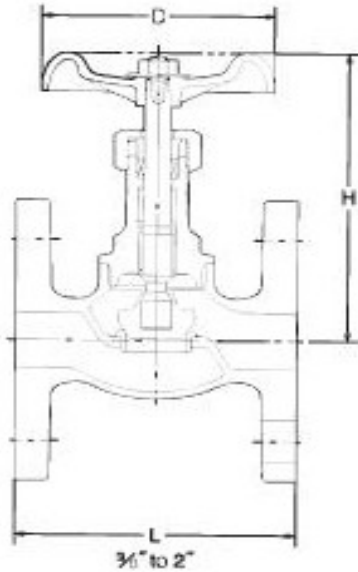

Test pressure

Body	2.06MPa (21kgf/cm ²) [hydrostatic]
Seat	1.51MPa (15.4kgf/cm ²) [hydrostatic]
	0.59MPa (6kgf/cm ²) [air]

Materials

Parts	JIS material
Body	FCD-S
Bonnet	FCD-S
Stem	SUS 420J2
Disc	SUS 403
Body seat ring	SUS 403
Gland	SUS 403 (1/2" & 3/4" : SUS420J2)
Gland packing	Non asbestos
Packing nut	FCD 400
Handwheel	FCD 450 (2 1/2" & 3" : FCD 400)
Wheel nut	SS 400
Gasket*	Non asbestos
Bonnet ring*	FCD-S
Name plate	A1050P

* Only for 2 1/2" & 3"

Dimensions

size	mm									
	mm inch	10	15	20	25	32	40	50	65	80
L		85	85	95	110	130	150	180	210	240
H (OPEN)		108	122	125	146	160	180	198	250	280
D		60	70	80	90	100	115	135	180	225



ERAWAN VALVES CO.,LTD.

43/9 Soi Sukhumvit 103, Sukhumvit Rd., Bangna, Bangkok 10260 Thailand

Tel: 02-747-5517 [AUTO], Fax: 02-747-5514, 02-399-4427

Website: www.erawantech.co.th E-mail: erawantech1@yahoo.com